


◎ PARTS DESCRIPTION

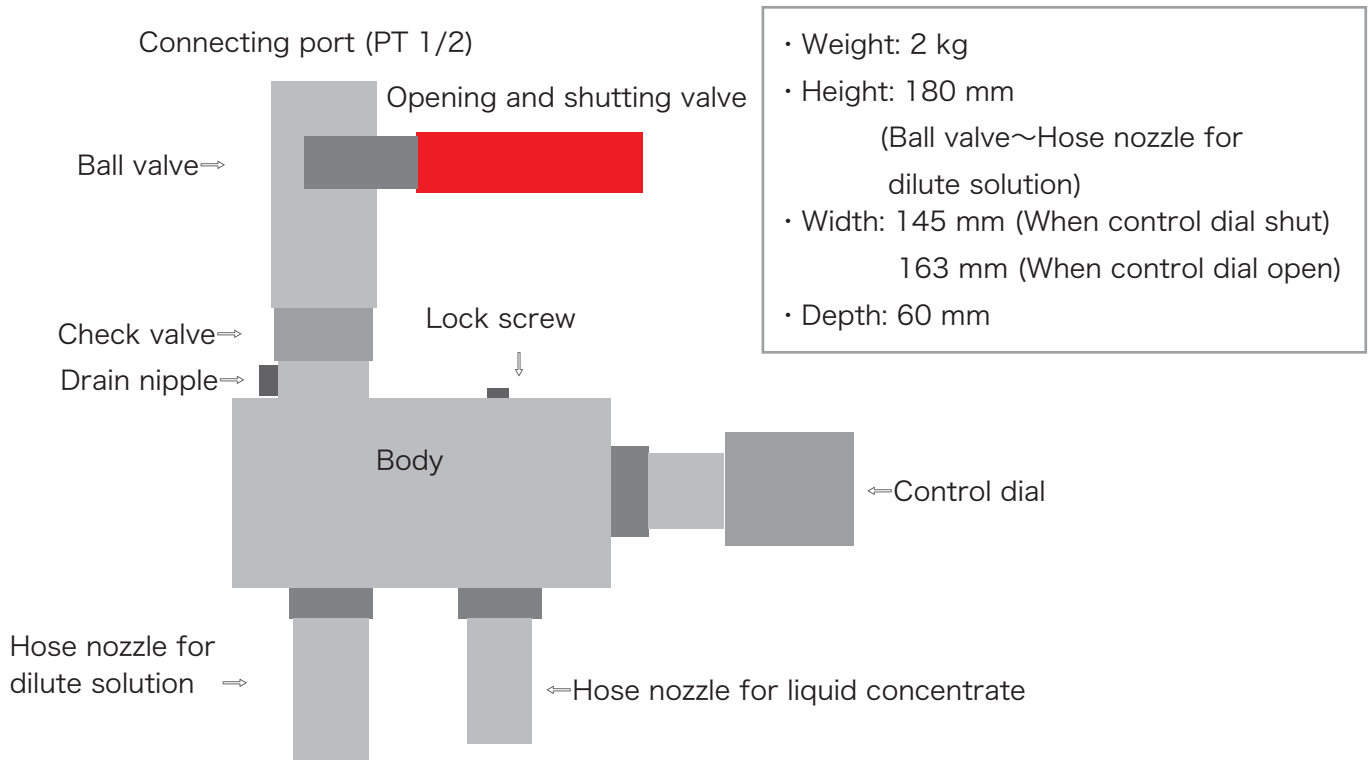

◎ CAUTION

- Direct piping to the waterworks is prohibited by the law. Please connect it with its own piping.
- Recommended hydraulic pressure is 100kPa. It is unusable under 50kPa or less.
- The dilution liquid hose of 10m can be attached horizontally at most, although filling up of liquid cannot be done from the body to the upper part.
- Please do not use it with the main body turned sideways or knocked down.
- Please avoid setting it higher than 2m from the surface of liquid concentrate.
- Please check the density of the dilute solution once a month.
- As the viscosity of liquid concentrate changes in summer and winter, check the density and change its setting.
- The guarantee of the product cannot be applied if it is taken apart or parts changed.
- If the pressure is too strong, a small amount of water comes out from the drain nipple when operating the lever but it is not a breakdown.

IIC I-ko Industrial Co., Ltd.

If you have any questions, please feel free to call us.



HEAD OFFICE

3-7-205 Miyanomae, Hiratsuka, Kanagawa
254-0035 Japan
Mail: iic@i-ko.jp URL: <http://www.i-ko.jp/>
Phone: (81)-463-23-6001 Fax: 81-463-21-6602