



Remainder gauge for a drum use

IMB-900

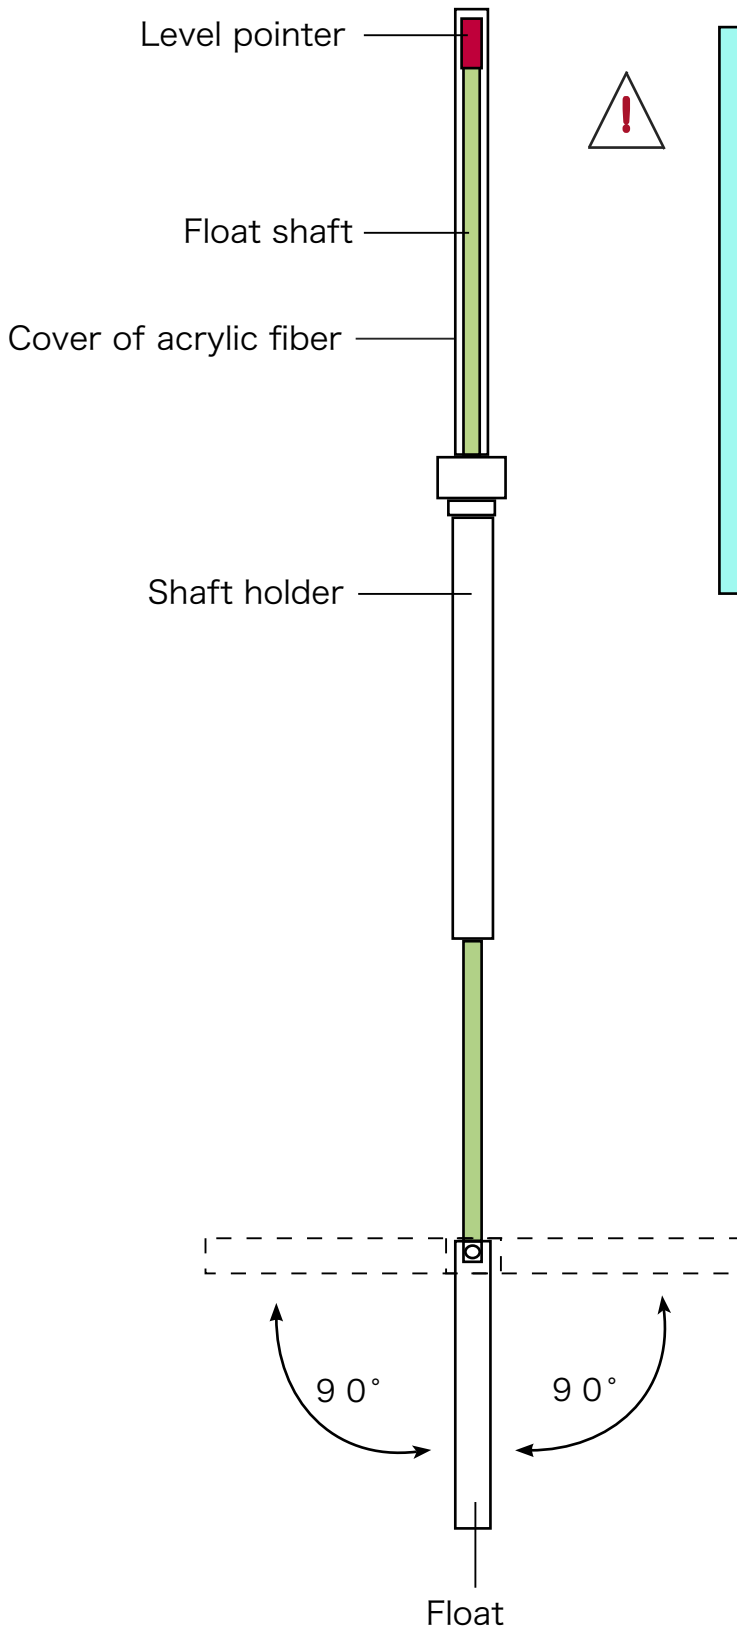

- Enable density is over 0.90 g/cm³
(For instance when density is 0.87 g/cm³, the float will go down about 10 cm below the surface.)
- Highly-volatile oil solution and gasoline cannot be used.
- Do not use any other container excluding drum cans.
- Please do not fail to set the float bended at a right angle.
- When setting it on and off, please do it up brown.
- It cannot be applied for a drum lying on its side.
- We supply only by the set, not for a part of it.
- Please do not remodel nor alter it.
- Please do not use it out of the purpose.

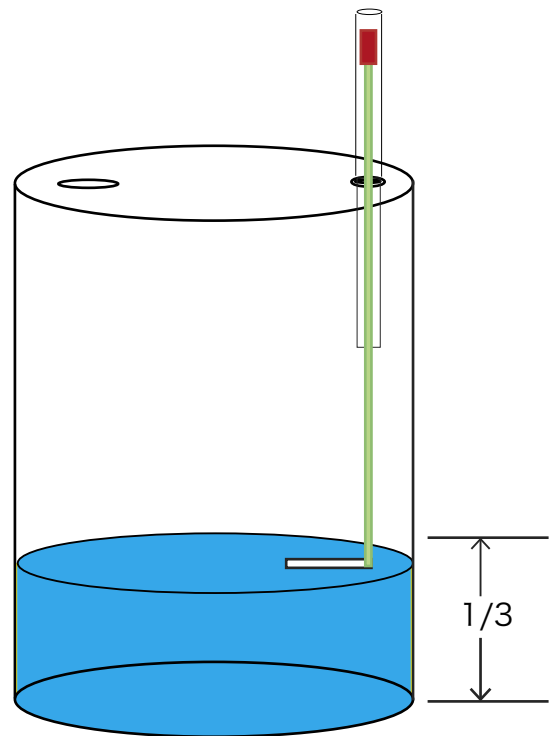

IIC I-ko Industrial Co., Ltd.

HEAD OFFICE

3-7-205 Miyanomae, Hiratsuka, Kanagawa
254-0035 Japan

Mail: iic@i-ko.jp URL: <http://www.i-ko.jp/>

Phone: (81)-463-23-6001 Fax: 81-463-21-6602

Agent